




Gellner Industrial, LLC
105 Tide Road, Hometown, PA 18252

PHONE: 570-668-8800

www.gellnerindustrial.com

water based industrial polymers

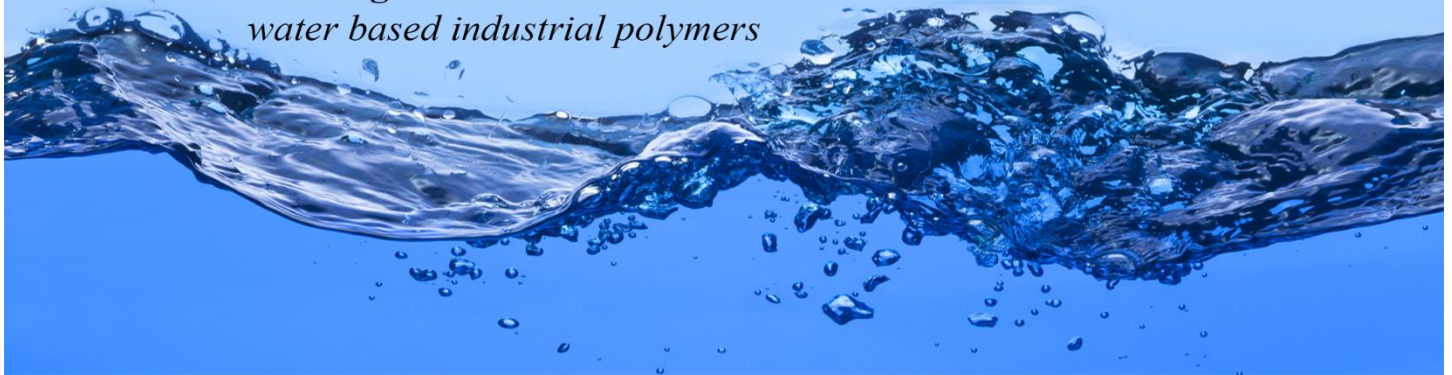

Ottopol 1960 Technical Data Sheet

Product Specifications

Description ----- Anionic Acrylic Emulsion
 Solids----- 61 – 63%
 pH----- 4.0 – 6.0
 Viscosity (@ 25°C) ----- 500 cps Max
 Flash Point----- Same as Water
 Glass Transition Temperature ----- -42° C

Appearance----- Milky Emulsion
 Specific Gravity ----- 1.05
 Weight/Gallon ----- 8.70
 FDA Status ----- None Known
 USDA Status----- No

Description – Anionic Acrylic Emulsion

Ottopol 1960 anionic acrylic emulsion is a high solids binder suitable for high performance sealants, patching compounds and contact adhesives as well as coating formulations.

It exhibits excellent adhesion to metal, plastics and masonry substrates and provides built-in flash rust protection.
